


FLOMORE

Different By Design

Model 2000 Tank Gauge

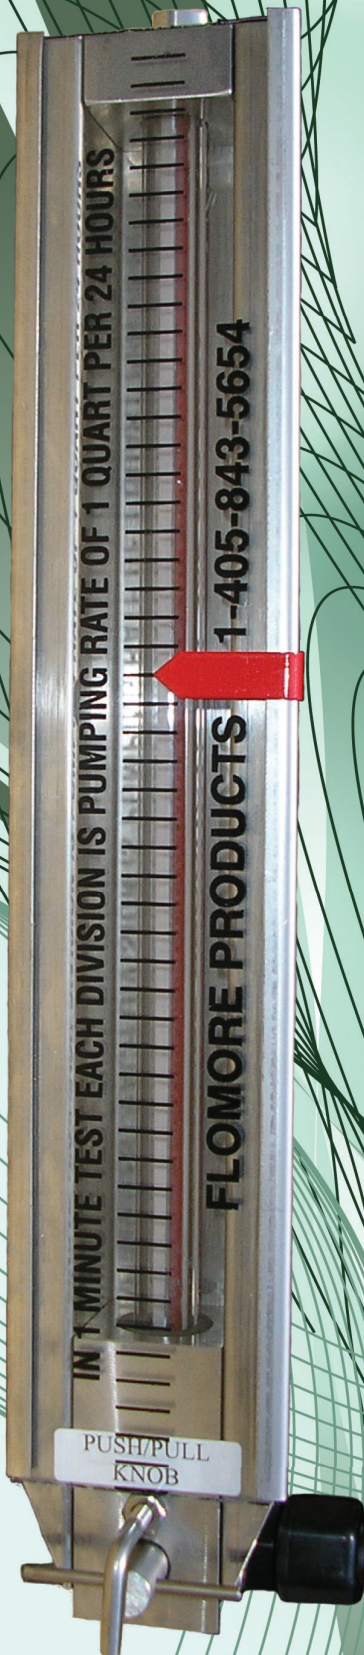

Model 2000 Tank Gauge

Features

- ◆ All metal parts are 303 or 304 stainless steel.
- ◆ Simple push-pull valve operation for test (push) run (pull).
- ◆ The movable level indicator is made from stainless steel and will not be effected by sunlight or ozone or break like an o'ring.
- ◆ 5 Gallon version (F-0871)
- ◆ 10 Gallon version (F-1285)

Maintenance

A gauge you can actually clean the tube without complete disassembly of the unit.

1. Empty the tank.
2. Remove Item #5, the 1/4" NPT plug on the bottom of the valve assembly.
3. Remove Item #18, the top vent plug.
4. Loosen Item #11, valve stop nut, so you can turn Item #9, valve stop, either right or left.
5. Pull Item #8, valve stem, completely out of the body.
6. Run a 5/8" tube brush thru the tube and out the bottom of the assembly. Hold down the tube to keep it from moving.
7. Inspect o-rings on valve stem, replace if needed and reinstall.

Parts List

Item #	Part #	# Reqd.	Description	Material
1	A-0306	1	Washer	Teflon
2	F-0871.01	1	3/4-16" Nut	Stainless Steel
3	F-0871.03	1	2-019 O-Ring	Viton
4	F-0871.04	1	2-006 O-Ring	Viton
5	A-0138	2	1/4" NPT Pipe Plug	Steel
6	F-0871.06	1	2-011 O-Ring	Viton
7	F-0871.07	1	Valve Body	Stainless Steel
8	F-0871.08	1	Valve Stem	Stainless Steel
9	F-0871.11	1	Valve Stop	Stainless Steel
10	F-0871.09	1	1/8" x 2" Roll Pin	Stainless Steel
11	F-0871.10	1	Valve Stop Nut	Stainless Steel
12	15470	2	Tube Gasket	Buna-N
13	D-0013	2	Tube End Seal	Viton
14	A-3102	1	Glass Tube	Glass
15	F-0871.15	1	Scale	Acrylic
16	F-0871.16	1	Housing	Stainless Steel
17	F-0871.17	1	Top Block	Aluminum
18	F-0871.18	1	Vent Plug	Stainless Steel
19	A-0987	1	Spacer	Teflon
20	F-0871.20	1	1/4-20" Nut	Stainless Steel
21	F-0871.21	1	1/4-20" x 3/4" Bolt	Stainless Steel
22	A-4092	2	Stat-O-Seal	Steel

